



Th. WORTELBOER B.V.

SLUISWEG 9
NL - 6582 AG HEUMEN
HOLLAND
PHONE +31 24 358 6514

www.wortelboer.ws

E-mail : info@wortelboer.ws

Pipe cutting and clicking machines

Thin-walled and stainless steel pipes


The type Wortelboer notching machines produce a deeper notch than the previous series. This means they are particularly suitable for thin-walled, aluminium, stainless steel and steel pipes with a maximum wall thickness between 2 and 3 mm. A tool highly suitable for use during welding processes.

Type AL Manual operated for O.D.

AL-1 Ø 26,9 - 33,7 - 42,4 mm. (3/4" - 1" - 1.1/4")
AL-2 Ø 48,3 - 60,3 mm. (1.1/2" - 2")
AL-3 Ø 42,4 - 48,3 mm. (1.1/4" - 1.1/2")

AL-U pipe notching machines are available for cutting out the venting slots in round square-section steel pipes with outside diameters from 22 mm. Upwards and with a thickness of max. 3 mm.

Type AL-U Ø 22,0 - 76,0 mm.

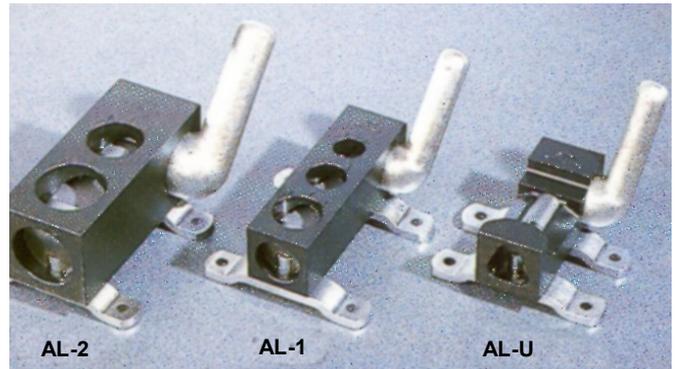

Electric drive

For situations many notches have to be made, Wortelboer delivers a notching machine with a 2.2 kW electric motor. The motor forms one unit with the special eccentric shaft which drives the notching tool. The motor is also fitted with an on/off switch with zero voltage protection and a guard.

Type AL Electric drive 380 V:

AL-1 + 2 E usable for sizes as AL-1 and AL-2
AL-1 + 2 U as AL-1 and 2E+ clicking zinc-outlet

