



**Th. WORTELBOER B.V.**

SLUISWEG 9  
NL - 6582 AG HEUMEN  
HOLLAND


PHONE +31 24 358 6514

[www.wortelboer.ws](http://www.wortelboer.ws)

E-mail : [info@wortelboer.ws](mailto:info@wortelboer.ws)

## **Model TAF - OUTSIDE CLAMPING FLANGE GROOVING- / FACING MACHINES**

Electric / Pneumatic / Hydraulic  
for Facing / Grooving / Milling  
from sealing surfaces / turntables.

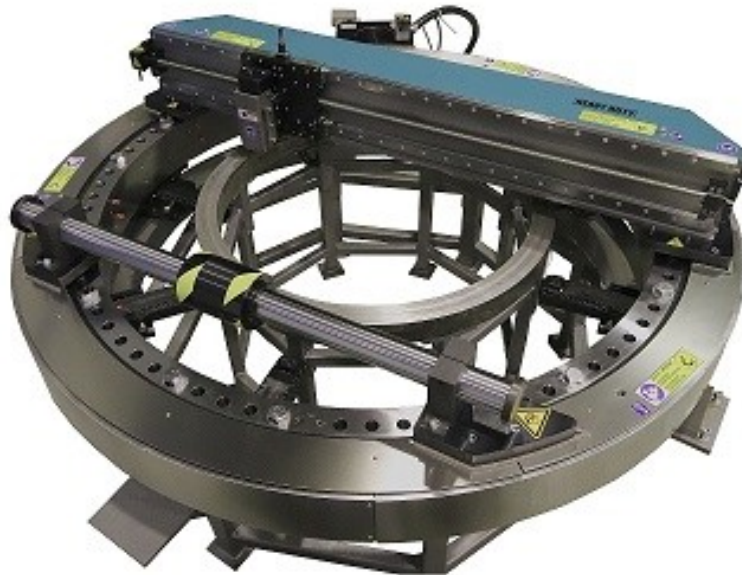

- Machining flange facings • easily operating
- 100% explosion safe • short machining time

With the TAF Flange Facers, damaged or warped flange surfaces can be easily cleaned up. Depending on the operation (turning or milling or grinding) one can select all values of surface coarseness.

A radial power system is also built on the machine for all types of drive.

Because the radial feed is adjustable, all roughnesses of the gasket surface can be realized.

Depending on the application, the mentioned drives are available and the machine can be built from simple to CNC controlled.

The machines are supplied with an extensive set of extension wedges for the entire clamping range of the machine as well as the various tools and all together in a wooden storage / transport box.

A second box is required for the electric or hydraulic drive.

for

- heat exchanger manufacturing • offshore constructions
- apparatus manufacture • equipment constructions
- shipbuilding • machine construction • pipeline construction

# Technical specifications

## TAF - flange facing machines O.D.

Model	TAF 330	TAF 630	TAF 940
Min. Clamping range	60 mm outside.	180 mm outside.	500 mm outside.
Max. Clamping range	350 mm outside.	630 mm outside.	940 mm outside.
Min. Machining range	0 mm	0 mm	0 mm
Max. Machining range	330 mm *	630 mm *	940 mm *
Power	P / H / E / S **	P / H / E / S **	P / H / E / S **



Model	TAF 1300	TAF 1600	TAF 1800	TAF 2300
Min. Clamping range	760 mm outside.	1100 mm outside.	1250 mm outside.	1750 mm outside.
Max. Clamping range	1270 mm outside.	1530 mm outside.	1800 mm outside.	2290 mm outside.
Min. Machining range	0 mm	0 mm	0 mm	0 mm
Max. Machining range	1270 mm *	1530 mm *	1800 mm *	2290 mm *
Power	P / H / E / S **	P / H / E / S **	P / H / E / S **	P / H / E / S **

\* Depending on work.

\*\* Pneumatic / Hydraulic / Servo motor Electrical.

### ACCESSORIES:

- carriage for planing.
- carriage for parting and beveling.
- carriage with milling drive.
- carriage with grinding drive.

Inform for rental / purchase possibilities from the TAF flangefacers  
or ask for a demonstration.