



Th. WORTELBOER B.V.

SLUISWEG 9

NL- 6582 AG HEUMEN

HOLLAND

PHONE 31 - 24 - 35865 14



www.wortelboer.ws

E-mail : info@wortelboer.ws

WRB-E ROLLERBLOCK - BEAMSUPPORT

Our NEW rollerblock for easy mounting on the flange of the beam and clamps with only 2 bolts. Optionnally can be provided with a 5 mm plastic plate thickness at the bottom of the support against damaging the conservation. There is no protection on the bolt.

Load capacity:	1,000 Kgs.
Safety factor:	2 x
Max. flange THICKNESS:	35 mm. 30 mm. with plastic
Roll material:	Polyurethan - YELLOW
Roll shape:	Diabolo
Hardness:	95 Shore
Total dimensions:	275 x 85 x 105 (+ 40 mm)
Weight per piece:	approx. 6 kg.

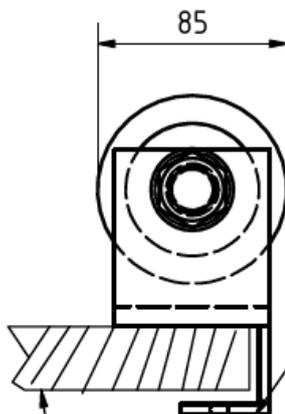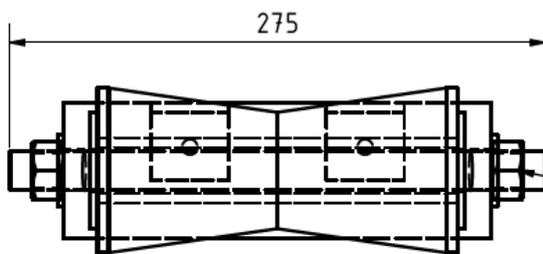

FLANGE OF BEAM WHERE
WILL BE CLAMPED

ANGLE PROFILE FOR
CLAMPING BY BOLTS
ON THE FLANGE OF
THE BEAM



OPTION: SURFACE ON
SUPPORT TO THE BEAM
with 5 MM. PLASTIC