

SLUISWEG 9 NL - 6582 AG HEUMEN HOLLAND


PHONE +31 24 358 6514

www.wortelboer.ws

E-mail : info@wortelboer.ws

MFF FLANGE FACERS

hand powered flange facing machines For 13,5 till 560 mm

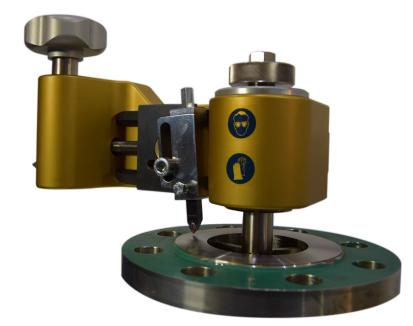

motorless flange face machining • easy to operate
100% explosion safe • short machining times

Damaged flange facings can be repaired with the manual operated MFF Mini Flange Facers.


By turning the machine by hand, the tool moves back and forward.

The quality of the finish depends on the choice of the spindle.

The MFF is supplied standard with a spindle for stock finish. Spindle for smooth finish is available.

The EVO model has a gearbox and can do both smooth and stock finish.

The machining capacity goes from 13,5 till 560 mm. By means of exchangable clamp sets it is possible to clamp the range of the machine.



for

- heat exchanger manufacturing offshore constructions
 - apparatus manufacture
 equipment constructions
- shipbuilding machine construction pipeline construction

Technical specifications MFF flange facers







Model	MFF Minifacer Small Bore	MFF Minifacer	MFF Minifacer EVO
Min. Clamping range	13,5 mm i.d.	25 mm i.d.	48,2 mm i.d.
Max. Clamping range	30,5 mm i.d.	252 mm i.d.	466 mm i.d.
Min. Turning range	13,5 mm	25 mm	48,2 mm
Max. Turning range	350 mm	350 mm	560 mm
Working weight	6,5 Kgs	7 Kgs	9 Kgs
Total set weight	14 Kgs	15 Kgs	34 Kgs
Min. swing diameter	560 mm	560 mm	584 mm
Surface finish	Stock finish (1)	Stock finish (1)	Stock & Smooth finish

⁽¹⁾ Spindle for smooth finish optional available.



The MFF comes in a strong case that includes clamping parts, hand tools and a set of cutting tools.

Inform for more capabilities of the MFF flange facers or ask for a demonstration.

